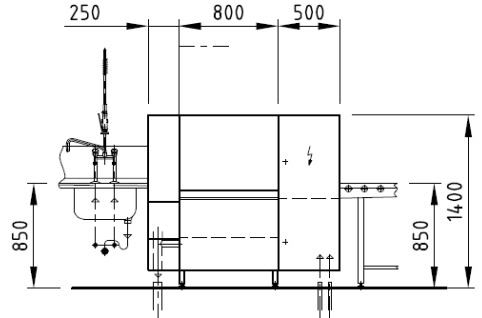
	<p><u>Manufacturer</u></p> <p>MEIKO Maschinenbau GmbH & Co. KG</p>
	<p><u>Model no.</u></p> <p>MMF K 200 M</p> <hr/> <p><u>Product Description</u></p> <p>K-Tronic Single Tank Rack conveyor Dishwasher</p> <hr/> <p><u>Origin</u></p> <p>Zhongshan, China</p>
SPECIFICATIONS	
<p>Function</p>	<p>Single tank rack conveyor dishwasher with Main Wash Zone and Final Rinse Zone</p> <p>The function of the dishwasher is to provide the mechanical action necessary to distribute and direct the detergent solution and rinse waters over, under and around the dishes to loosen and remove soil. The dishwasher must also remove soil-laden waters from the machine and provide drying of dishes after the cleaning process has been completed. This should be done with the lowest consumption of fresh water, energy and chemical products</p>
<p>Form</p>	<p>Dimension : L 1550mm x D 830mm x H 1400mmH Entry height : 450mm Entry Width : 510mm Rack Size : 500 x 500mm</p>
<p>Construction</p>	<ul style="list-style-type: none"> - Heavy duty stainless steel construction with double insulated walls, 4 door springs per door with counterbalance and security switch - Tandem filter system to remove fine food particle from wash water - V-tank with rounded edges for easier cleaning - Heavy gauge stainless steel pump impeller and housing - Energy management concept with low energy management - Electronic control system with temperature display
<p>Engineering / MEP Ratings</p>	<ul style="list-style-type: none"> - Voltage 400V/3NPE/50Hz - Connecting Load 49.8kW - Nominal Current 71.1 A (with/without heat recovery) - Final rinse water consumption: 360 l/h - Water inlet connection : DN 20 - Combined single Drainage point connection: DN 70

Capacity	130/200 basket per hour
Sanitation	Entirely corresponds to the regulations of DIN SPEC 10534 for industrial dishwashing with multi-tank transport dish washing machines Main wash section(s) 55°C – 65°C Final rinse section 80°C – 85°C
Accessories	<ul style="list-style-type: none"> - 1 x Universal basket VKV50/1 - 1 x basket for small pieces VKV 50/2 - CSSplus-system - Emergency off switch - Double wall insulation - Heat recovery (Optional) - Drying zone (Optional) - Table end switch (Optional) - Suction canal with fan (Optional)
Safety	<ul style="list-style-type: none"> - CE (European Standard) - DIN SPEC 10534
Special Requirement	<ul style="list-style-type: none"> - Water Hardness max. 3°dh or approx. 50 ppm