


AVIOSOLV I

Non Flammable Cleaner

8000

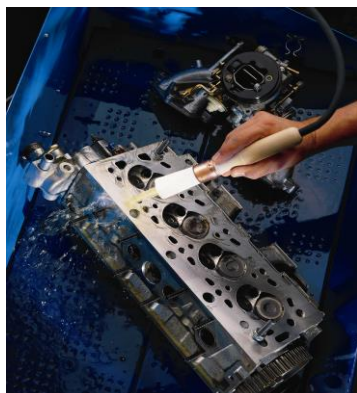

DESCRIPTION

AVIOSOLV I is an odourless, colourless solvent blend formulated for effective removal of light and heavy soils from aircraft metal components.

AVIOSOLV I is non-flammable and offers the perfect solution for a safe working environment.

APPLICATION



AVIOSOLV I is particularly recommended for the removal of dust, oil, grease and general soil from components and engine parts, electrical and electronic systems.

AVIOSOLV I may be used as a safe multi-purpose degreasing fluid in any workshop for degreasing mechanical parts and devices.

PRODUCT BENEFITS

- Powerful degreasing action.
- Non flammable for a safer working environment.
- Will air dry to leave a residue free surface.
- Safe on all metals.
- Low toxicity.
- Odourless for greater user comfort.
- Versatile: suitable for immersion, wipe or spray application.
- Multi purpose product to reduce inventory and cost.
- Contains no Chlorinated Hydrocarbons for a more environmentally friendly approach.

PHYSICAL PROPERTIES

Appearance	Liquid
Colour	Colourless
Odour	Nil
Specific Gravity @ 15°C	0.758 ± 0.005
Flash Point (TCC)	>62°C
Solubility	Immiscible with water
T.L.V.	300ppm

APPROVALS / CONFORMANCES

- B.A.E. ABR9-0140 Type 2
- Rolls Royce 1/257C
- Rolls Royce CSS 255 (Non-aqueous Cleaning Fluids)



DIRECTION FOR USE

Wipe Application:

Using clean cloth soaks with **AVIOSOLV I** and wipe surface clean of soil. Follow by wiping with another clean cloth wetted with **AVIOSOLV I**.

Spray Application:

Using a hand spray or non-atomising air operated pump spray clean parts.

Immersion:

Single Tank Operation:

Soak parts in undiluted **AVIOSOLV I** until soil is dissolved or loosened. Brush clean residues then flush parts over the tank with fresh **AVIOSOLV I**.

Double Tank Operation:

Soak parts in Tank No.1 to remove excessive soil. Transfer parts to Tank No.2 and allow a reasonable dwell time to remove or soften soil. Lift parts above Tank No.2 allow to drain then flush parts with fresh **AVIOSOLV I**. Allow parts to air dry or blow off with oil and water free air. When Tank No.1 becomes excessively soiled dispose of the fluid and replace with **AVIOSOLV I** from Tank No.2. Refill Tank No.2 with fresh **AVIOSOLV I**.

NOTE: Compatibility test is required before use on plastics, paints and rubbers.

STORAGE & SAFETY

Two years, stored in closed original packaging in a cool and dry place. **NON HAZARDOUS**. Avoid contact with eyes and skin. Wear safety glasses if dusting is likely to occur. Wear rubber gloves if prolonged skin contact is expected. Avoid breathing dust.

For further information please refer to the Material Safety Data Sheet.

PACKAGING

Ref: A-8000-O2 Pail 25L
Ref: A-8000-U2 Drum 205L

WARRANTY

The information contained herein is presented without guarantee or warranty and the Seller disclaims any liability incurred from the use thereof. Nothing contained herein is to be construed as a recommendation for any use in a commercial process not controlled by the Seller, nor for a use which is in violation of any existing patent, foreign or domestic, or of applicable laws and regulations. THE SELLER MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OR MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, EXCEPT AS EXPRESSLY STATED IN SELLER'S SALES CONTRACT OR SALES ACKNOWLEDGEMENT FORM.